

DURASILE®


AF-ACID

Technical Datasheet

Material Type	: ASBESTOS FREE GASKET MATERIAL.
Material Composition	: Aramid Fibres, Mineral Fibres. (Binders: CSM Elastomers)
Application	: Suitable for various highly aggressive media and very good chemical-resistance to Acid and Alkaline media.
Thickness	: 0.50mm to 5.00 mm
Surface Finish	: White/White
Operating Condition	: Max. Peak Temperature: 400 °C : Max. Operating Temperature: 270 °C : Max. Peak Pressure: 150 bar : Max. Continuous Temp. with steam: 240 °C
Compliance	: ASTM F 104 Line call out: F 719911 E19 A9 B3 M6
Dimensions of standard sheets	: 1500 X 1500 mm, 1500 X 2000 mm, 1500 X 2250 mm 1500 X 3000 mm, 1500 X 4500 mm, 2000 X 3000 mm

Areas of Application

- Area (a) refers: The gasket material is normally suitable subject to chemical compatibility.
- Area (b) refers: The gasket material may be suitable but a technical support is recommended.
- Area (c) refers: Do not install the gasket without technical evaluation.

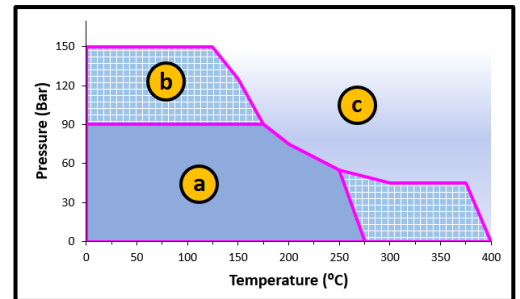

(The following Information applies to material thickness 2.0mm.)

S No.	Typical Properties	Test Method	Specified Value	Unit
1	Density	ASTM F 1315	1.6 – 2.0	g/cm ³
2	Tensile Strength	ASTM F 152	≥ 14.0	N/mm ²
3	Compressibility	ASTM F 36 A	6 – 12	%
4	Recovery	ASTM F 36 A	≥ 40	%
5	Gas Permeability	DIN 3535	≤ 0.50	cm ³ /min
6	Ignition Loss	DIN 52911	≤ 32.0	%
7	(A) Stress Relaxation (16h, 175 °C)	DIN 52913 / BS 7531	≥ 30.0	N/mm ²
	(B) Stress Relaxation (16h, 300 °C)	DIN 52913 / BS 7531	≥ 25.0	N/mm ²
8	Fluid Absorption			
	(A) In ASTM Oil No. 3 (5h, 150 °C)	ASTM F 146		
	Increase in Mass		≤ 10	%
	Increase in Thickness		≤ 8	%
	(B) In Fuel B (5h, 25 °C)	ASTM F 146		
	Increase in Mass		≤ 10	%
	Increase in Thickness		≤ 7	%
	(C) In Water (5h, 100 °C)	ASTM F 146		
	Increase in Mass		≤ 10	%
	Increase in Thickness		≤ 7	%

*Size Tolerance: ± 10% | Thickness Tolerance : 0.10mm for <1.00mm & 10% for >1.00mm

NOTE: All information and recommendations given in this brochure are correct to the best of our knowledge. Since conditions of use are beyond our control. The information provided can only serve as a guideline. Users must satisfy themselves that products are suitable for the intended process and uses. We reserve the right to change product design and properties without notice.